
## **INSTALLING A NISSAN ECU**

- LOCATE THE ECU ON THE CHART BELOW.
- DISCONNECT THE BATTERY.
- UNBOLT THE ECU FROM THE VEHICLE AND USING A 10 M.M. SOCKET (SINGLE CONNECTOR TYPE ONLY), DISCONNECT THE ELECTRICAL CONNECTOR.
- INSTALL NEW ECU IN REVERSE ORDER MAKING SURE THAT THE ELECTRICAL CONNECTOR IS FULLY SEATED AS SHOWN BELOW. FAILURE TO DO THIS WILL RESULT IN ABNORMAL PERFORMANCE OF THE VEHICLE.

MODEL	LOCATION
240SX ALL	D
280ZX ALL	Α
300ZX TO '89	D
300ZX 90+	С
TRUCK & PATH-	E
FINDER 86+	
G20 ALL	В
Q45 ALL	ENG. = D TRANS =
SENTRA / 200SX 91+	В
MAXIMA 89+	В



NOTE: FOR SINGLE CONNECTOR TYPE ECU'S MAKE SURE THAT THE CONNECTOR IS DRAWN IN EVENLY ON BOTH SIDES OF THE BOLT SO THAT ALL OF THE ELECTRICAL CONNECTIONS ARE SECURE. THE CONNECTOR MUST BE FLUSH WITH THE EDGE OF THE ECU ALONG ITS FULL LENGTH AS SHOWN IN THE LOWER PICTURE BELOW.

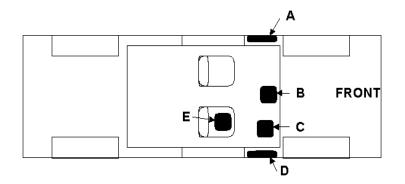